

温度开关

Temperature
switch


SdT5400系列

应用于工业、冶金及机械液压领域

- 精度 $\leq 0.02\%$ F.S.
- 4个字符的数字显示，实时显示设定值和
- 当前值，单位可以任选
- 设计紧凑，可随意转动调节，使用方便
- 可任意设置开关量动作
- 可编程
- 电磁兼容性好
- 良好的长期稳定性
- 防护等级IP67



外形尺寸图 Dimensions

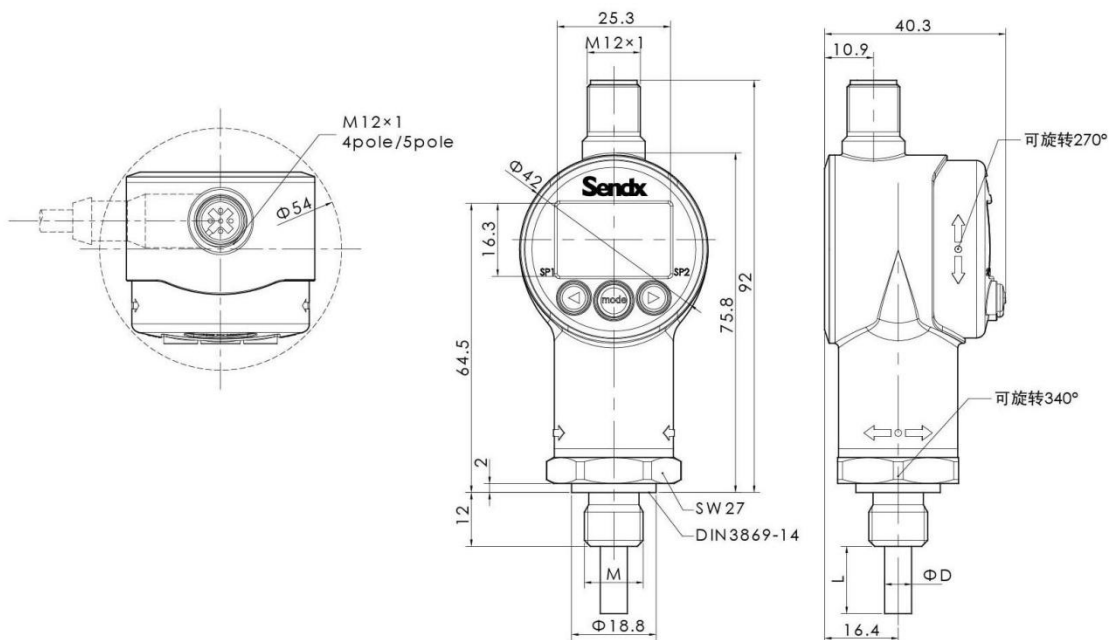

技术参数 Technical Parameter

参数		Specifications	技术指标		Technical Data
输入数据		Input data			
温度范围	Measuring range	-25...+125℃			
探头长度	Probe length	18mm (selectable)	max. 800		
耐压性	Pressure resistance	600Bar			
机械连接	Mechanical connection	G1/4 A DIN 3852	Threaded port DIN 3852-G1/4	G1/2 B DIN 3852	
锁紧扭力	Torque value	20N.m	20N.m	45N.m	
输出数据		Output data			
输出信号	Output signal	Selectable			
开关类型	Type	-1PNP transistor switching output -2PNP transistor switching outputs (only in conjunction with electr.conn.M12×1,4 pole)			
开关方向	Switching direction	N/C/C/O function(according to customer specification)			
输出量	Output load	≤500mA per Switching output			
精度	Accuracy	≤±1.5%F.S typ. ≤± 3.0%F.S max.			
重复精度	Repeatability(at 25℃)	≤±1.0%F.S max.			
开关延迟	Rising switch point and falling switch point delay	32ms standard (8...2000ms pre-set to customer spec.)			
环境条件		Ambient conditions			
环境温度范围	Ambient temperature range	-40...+85℃			
储存温度范围	Storage temperature range	-40...+100℃			
流体温度范围	Fluid temperature range	-40...+125℃			
CE 标记	CE mark	EN 61000-6-1/2/3/4			
耐振动	Vibration resistance to DIN EN 60068-2-6 at 10...500Hz	≤25g			
耐冲击	Shock resistance to DIN EN 60068-2-27	100g/6ms/half sine 500g/1ms/half sine			
防护等级	Protection class to DIN 40050	IP67			
其他数据		Other data			
电气连接	Electrical connection	M12×1 4-pole male M12×1 5-pole male			
电源电压	Supply voltage	24VDC±4VDC			
电压电流残余脉冲	Residual ripple of supply voltage	≤ 5%			
重量	Weight	approx. 150 g			

54-系列 温度开关

选型表 Model code:

SDT 54 X X - X - X - X - XXX (000)

机械连接 Mechanical connection

- 1 = G1/2-B DIN 3852 (male)
- 4 = G1/4-A DIN 3852 (male)
- 5 = G3/8-A DIN 3852 (male)
- 6 = R1/4
- 8 = 1/4-18 NPT
- A = M20×1.5
- B = M12×1
- C = M12×1.5
- D = M14×1.5
- E = 1/8 NPT
- F = R3/8
- G = M10×1
- H = R1/2
- M = 客户定制

电气连接 Electrical connection

- 6 = M12x1 4 pole, male (connector not supplied)
- 8 = M12x1 5 pole, male (connector not supplied)

输出信号 Output

- 0 = 一路常闭
- 1 = 一路常开
- 2 = 两路开关
- 3 = 一路开关, 一路4~20mA
- 5 = 二路开关, 一路4~20mA

操作温度 (°C) Operating temperature in °C

- 1 = -30°C~+130°C
- 2 = -40°C~+130°C
- 3 = -40°C~+150°C
- 4 = -50°C~+150°C
- 9 = 客户定制

保护管直径 D(mm) Protective tube diameter D in mm

- 4 = 4mm
- 5 = 6mm
- 6 = 8mm
- 9 = 客户定制

内置长度 (mm) Built-in length L in mm

- 005: L=5mm
- 050: L=50mm
- 200: L=200mm
- 800: L=800mm
- L:0~800mm范围内可选

其他选型 Other options

- 000 = 标准 (无电缆线)
- 020 = 2m 电缆线 (对应电器连接选项母端电缆线)
- 050 = 5m 电缆线 (对应电器连接选项母端电缆线)


接线定义 Pin connections:

M12×1 4-pole male




Pin	SDT54X6 -0	SDT54X6 -1	SDT54X6 -2	SDT54X6 -3
1	+24VDC	+24VDC	+24VDC	+24VDC
2	n.c.	n.c.	SP2	4~20mA
3	0V	0V	0V	0V
4	SP1	SP1	SP1	SP1

M12×1 5-pole male




Pin	SDT54X8 -5
1	+24VDC
2	4~20mA
3	0V
4	SP1
5	SP2

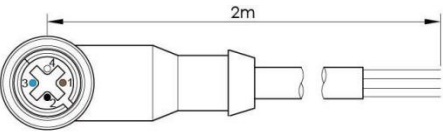

Female connector M12×1
4-pole male,right-angle

- 1号线: 棕色
- 2号线: 白色
- 3号线: 蓝色
- 4号线: 黑色

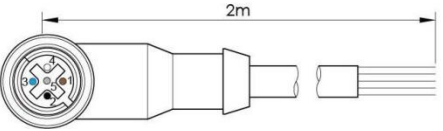

Female connector M12×1
5-pole male,right-angle

- 1号线: 棕色
- 2号线: 白色
- 3号线: 蓝色
- 4号线: 黑色
- 5号线: 灰色